
NEW Pinpointe Blackout FR



NIGHTFALL NEW PINPOINTE BLACKOUT FR

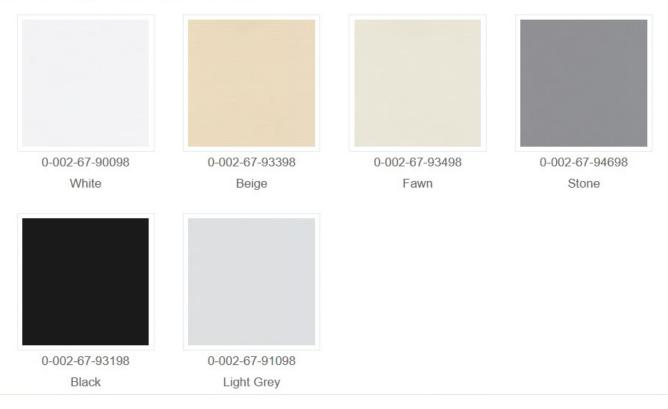

TECHNICAL PROPERTIES

Composition Weight Thickness Roll Width Roll Length UV Blockage Light Fastness Flame Retardant 65% PVC + 35% PES 470 g/m² ± 5% | 13.86 oz/yd² ± 5% 0.33 mm ± 5% | 0.013 in ± 5% 1.83 m & 2.5 m | 72 in & 98 in 25 m | 27 yd 100% 4 Xenotest Grade NFPA 701

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



- 1. Hand wash with cold water and a mild 5% detergent solution.
- 2. Wipe gently with a wet sponge.
- 3. Vacuum clean for regular maintenance.
- 4. Do not wring dry.
- 5. Do not bleach.
- 6. Do not dry clean nor use steam cleaning.

MANUFACTURING





Use Only on Ultra Roll Direction NOT

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Roller

Shades



Sliding

Panels



Indoor Use Only



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

vertilux.com © 2021. Vertilux, Ltd. All Rights Reserved. 1st Edition.